



# Vitae+

# Infrared radiator for IR warming cabins with built-in dimmer

Full spectre IR radiator with high-performance quartz glass emitter and built-in dimmer. Completely with durable housing, protective grill and pre-mounted cable. For domestic and commercial use.

### Your advantages:

- Full, high intensity power output in less than a second
- Full spectre infrared radiation IR-A, IR-B and IR-C
- Built-in dimmer for quick and easy heat adjustment
- Available in 3 power outputs: 350 W, 500 W, 750 W
- Completely pre-mounted with durable stainless steel housing, polished aluminium reflector and protective grill
- Integrated inrush current limiter
- Including 3 m silicone cable
- Made in Germany quality by EOS

#### **Features and specifications:**

Stainless steell Housing: Reflector: Polished aluminium

Cover: Protective grill, aluminium, with black

flocking

Dimming: Built-in dimmer with on/off function Connection cable: Silicone cable 3x1,5 mm<sup>2</sup>, apporx. 3 m,


with Wieland type plug

Dimensions (HxWxD): 990 x 185 x 65 mm Power output: 350 W, 500 W, 750 W Power supply: 230V 1N AC 50 Hz

Installation: In the cabin side walls or corners,

vertically or horizontally.

No ceiling installation permitted!















#### **Connection overview**



By 750 W radiators max. 4 units (3500W) possible by 16 A capable connection line.


#### Installation

**Technical specifications** 

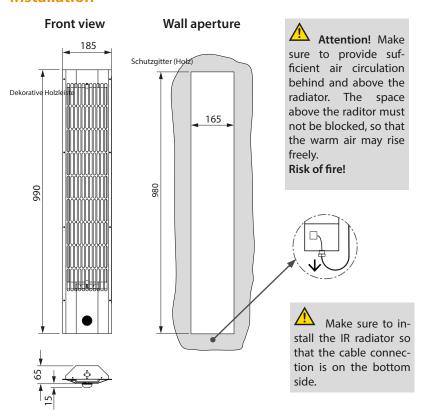

#### **Installation hints**


#### Vertical installation in the wall





## Air ventilation at the back required

#### Vertical installation in the corner



# Spare parts and accessories

Description	Item no.		
Emitter Vitae 350 W	20013034		
Emitter Vitae 500 W	20012814		
Emitter Vitae 750 W	20012815		
Cover plate by corner position	20016262		
Protective grill, black flocking	1349804		
Plug adaptor	94.2046		
Triangle cover for corners	94.4566		



Triangle cover for raditor installation in corners, 94.4566

Item no.	Power supply	Power output	IR emitter	IR spectre	Dimentions, HxWxD	Wall aperture	Weight without packing	Suitable control units
94.7000	230V 1N AC 50 Hz 500	350 W	Vitae quartz glass emitter	0,8 - 10 μm IR-A IR-B IR-C	990 x 185 x 65 mm	165 x 890 mm	2,8 kg	Infratec Classic Infratec Premium SBM-LSG-IR or SBM-IR module
94.7001		500 W						
94.6862		750 W						

Druck-Nr.: 29344984 / 14.19 Technical changes reserved